


Telephone **DOMO** *Messages*

hands free



USER MANUAL

Telefonica

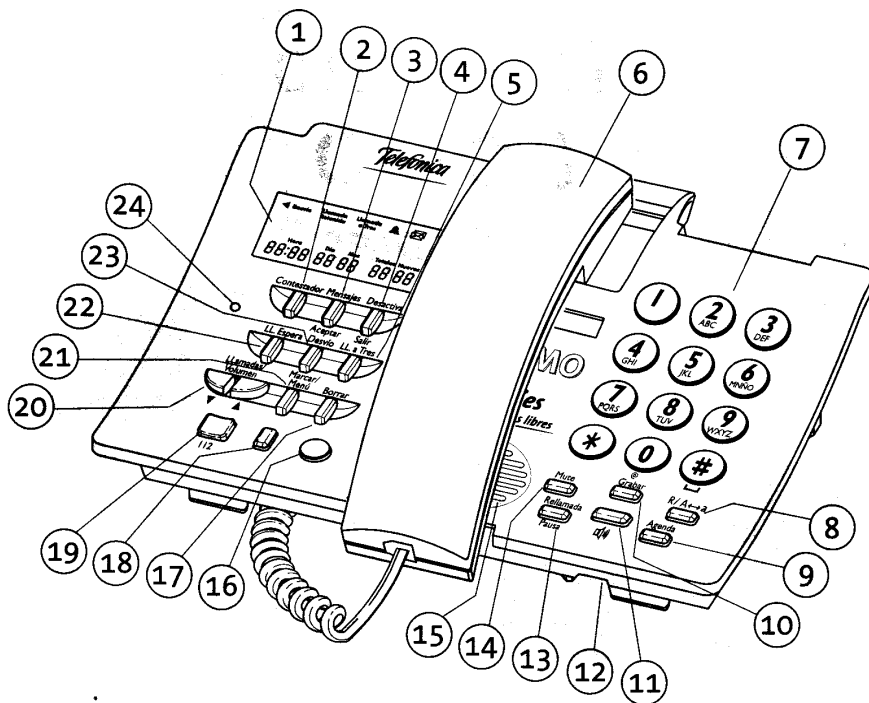

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. Viewer. 2. Key Answering machine. 3. Key Messages/Accept. 4. Key Deactivate/Exit. 5. Key LL. at Three. 6. Handset. 7. Keyboard of Machine. 8. Key R; change from/to Uppercase/Lowercase. 9. Key Phone Book. 10. Key to Record. 11. Key Free Hands 12. Microphone. | <ol style="list-style-type: none"> 13. Key Rellamada / To Pause. 14. Key Mute. 15. Speaker. 16. Key to access Personal Attention of Telefónica 1004. 17. Key to Erase. 18. Key to Telefónica operator 1077. 19. Key to access European Emergency Number 112. 20. Scroll Keys and Volume. 21. Key for Menu and Selecting 22. Key to hold second caller. 23. Key to Divert 24. Indicator light |
|---|--|

INDEX

1.	INTRODUCTION	4
2.	INSTALLATION	6
3.	CHANGING THE SETTING	7
4.	DIALLING	11
5.	USE OF THE PHONEBOOK	13
6.	ACCESSING TELEFÓNICA SERVICES	16
7.	MUTE FUNCTION	17
8.	CALLER INDICATION	18
9.	HANDS FREE FUNCTION	18
10.	VIEWING CALLER NUMBER	20
11.	SUPPLEMENTARY SERVICES	23
	DIVERTING INCOMING CALLS	23
	ANSWER MACHINE SERVICE	24
	ACTIVATING THE ANSWERING MACHINE	24
	TRANSFERRING CALLS	25
	THREE-WAY CALLS	25
12.	TEXT MESSAGING (SMT)	27
	ACTIVATING / DEACTIVATING MESSAGING SERVICE (SMT)	28
	CHANGING EXTENSION	29
	PRIVATE MAIL	31
	EDITING AND SENDING A NEW MESSAGE	33
	RECEIVING A MESSAGE	37
	READING MESSAGES	37
13.	DISTRIBUTION LIST FOR MESSAGING	40
14.	CHANGE ANSWERPHONE LANGUAGE TO ENGLISH	43
15.	TROUBLESHOOTING	44
16.	MAINTENANCE	45
17.	TECHNICAL SPECIFICATIONS	45
18.	CERTIFICATE OF GUARANTEE	46
19.	CONDITIONS OF GUARANTEE	47

1.INTRODUCTION

This booklet is provided with the DOMO Messages Hands Free telephone equipment. It is recommended that you read it thoroughly before using the new telephone. It is laid out in an order that makes subjects easy to find, and includes the methods to access the various services provided by Telefónica and describes the messages that are displayed in the viewer.

The DOMO Messages Hands Free is an electronic telephone of modern design that incorporates the following characteristics -

- Dialling.
- Numeric keyboard with alphabetic characters.
- On-screen display of the dialled number.
- Phonebook with a memory for up to 50 names and number.
- A listing with the last 50 incoming or outgoing calls.
- Hands Free function (◀))).
- Adjustment of the volume of the speaker.
- Adjustment of the volume of the microphone.
- Key R.
- Redialling from a list of outgoing Calls.
- Insertion of pauses while dialling.
- Viewer window with three lines of information.
- Shortcuts to the Telefonica's Supplementary Services: Call Waiting, Three-Way Calls, Call Diversion and Answering Machine Service.
- Text Messaging (SMT) - sending, receiving and editing text messages (SMT).
- Identification of incoming call numbers.
- Indicator light showing New Calls, Text Messages (SMT) and messages stored in the Answering Machine (if available from the telephone network).
- Shortcut to the Telefónica Personal Attention line - 1004 (Blue Key).

Shortcut to the European Emergency number - 112 (Red Key).

Shortcut to the Telefónica Operator - 1077 (Green Key).

Mute Function, with optical warning.

Activation / Deactivation of the 1077 Code.

All services available using one telephone line.

Reception capsule giving help to people with hearing difficulties.

Handset accessories such as line cords.

Installation possible during evenings.

Real-time clock.

Selection of three melodies and two-tone levels.

The DOMO Messages Hands Free comes with -

The Telephone.

The Handset.

Spiral cord for handset/base.

Line cord.

User Manual with guarantee card and Quick Guide of Use.

NOTE:

To be able to use the Identification of Calls option and other Supplementary Services that are offered with the DOMO Messages Hands Free telephone, it is necessary to have made a request for those services from Telefónica.

To send or to receive text messages, it will be necessary to activate the service according to instructions in section 12 of this manual - SERVICE OF MESSAGES OF TEXT (SMT). **Keep in mind that it is necessary to have requested the Identification of Calls Service.**

IMPORTANT NOTICE:

To connect two or more handsets for using messages, use **DIFFERENT EXTENSION**, read details on Extensions on page 27.

2. INSTALLATION

Installing DOMO Telephone and connecting it to a landline.



This telephone should only be connected to lines that have Multifrequency.

Connection of cord to the handset

Connect the longest end into the telephone base and the other end in the hand piece as shown in the figure.

Connecting the telephone line

Connect the end of the input cable to the apparatus and the other end into the socket of the phone plug.

Assembly of base stand

If you need to increase the apparatus inclination on the table, insert the base support bar into the apparatus and press until it clicks into place.

Adjust the cables under the apparatus to 'exit' in the best direction.

Assembly of hand piece





Fix a base support (optional) for wall assembly, if necessary.

Use the template provided with the base support, to mark the two holes to be drilled in the wall.


Connect the cable of external line in the screws located inside base.

Connect the cable of telephone line in the connector so it is housed internally.

Wind up surplus in the flukes as shown in the figure.



So that the handset stays in place when the apparatus is hung on a wall, it is necessary to take remove and rotate the piece of assembly as shown in the figure..

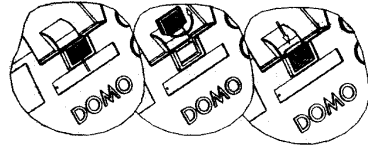

3. TELEPHONE SETTING

Once connected to the telephone line, you may need to change phone settings to suit your own requirements. You can change the ringtone and volume of the bell, adjust the viewer contrast, to program the hour and date, to activate or disable the tones of confirmation, validation and error, and to select the Code of Operator of Telefónica.

These adjustments are carried out with the telephone handset down and by pressing the **Marcar/Menú** key (21) repeated times until selected function is displayed in the viewer.

Selection of the melody tones

Press the **Marcar/Menú** key (21) until the message appears in the viewer.

CAMBIO RING: ↑

With the keys cursor ▲ ▼ (20) one of the three available ring tones can be selected and will be heard during selection.

Press **Desactivar/Salir** (4) when selection is complete.

Selection bell level sound

Press the key **Marcar/Menú** (21), until the Timbre option is shown in the viewer.

With the keys ▲ ▼ (20), select high level or low level of sound. In the viewer the selected level will be shown as a message, and with an Black bell icon (high) or half Black bell (low).

TIMBRE: ↓ HIGH ↑

TIMBRE: ↓ LOW ↑

Press **Desactivar/Salir** (4) to return to the normal display.

Adjusting the contrast of the viewer

Press the **Marcar/Menú** key (21) until the message appears in the viewer.

CONTRAST. ↑3↓

Press the **▲▼** keys (20) to increase or decrease the contrast. The level selected will be shown in the viewer.

Setting the hour and dates

Press the **Desactivar/Salir** key (4) to return to the normal display.

HORA/FEC PULSE.

Press the **Marcar/Menú** key (21) again until PULSE HORA/FEC. Is displayed.

With the handset down adjust the hour and date by typing them directly into the keyboard. If you make a mistake, use the **Borrar** key (17) to Erase.

For example, if the hour and date is the 20th. of November and 2:11am, type: 20100211.

HORA/FEC PULSE.

Once the last digit of the date has been typed, the new hour and date will be displayed in the viewer. If the process is not completed, the previous and date will remain displayed.

After finishing this operation, you will be able to select the next option by pressing the **Marcar/Menú** (21) key again, or return to the normal display by pressing the **Desactivar/Salir** key (4).

Remember, if you have the caller Identification service enabled, when receiving a call, the hour and date display will be adjusted automatically.

Tone confirmation of a pressed key

This Menu option lets you activate or deactivate the beep tone, which sounds when you press a key.

Press the **Marcar/Menú** key (21) until the viewer shows one of the following messages. If the beep has already been activated, this message appears in the viewer.

SONIDOS TECLA: SI

If the beep has already been deactivated, this message appears in the viewer.

SONIDOS TECLA: NO

Using the cursor keys **▲ ▼** (20) you can activate or deactivate the beep.

Press the **Desactivar/Salir** key (4) to return to the normal display in the viewer.

Validation and error tones

This Menu option allows you hear validation and error tones. The validation tone is a long tone which indicates that a function has been executed correctly. If the operation was incorrect, three short tones will be heard.

Press the **Marcar/Menú** key (21) until the viewer shows one of the following messages. If the validation and error tones are activated, this message is shown in the viewer.

SONIDOS V/E: SI

If the tones are disabled, this message is shown in the viewer.

SONIDOS V/E: NO

Using the cursor keys **▲ ▼** (20) you can activate or deactivate the validation and error tones.

Press the **Desactivar/Salir** key (4) to return to the normal display in the viewer.

**Activation /
deactivation
of the 1077
code**

Activating the 1077 code.

This option is disabled when you receive your DOMO telephone. This means that the numbers of missed calls, etc. cannot be viewed in the viewer.

To activate, press the **Marcar/Menú** key (21) until this message is displayed in the viewer -

ACTIVAR 1077

Type the sequence: *1077#-

In the viewer this message will appear for 2 seconds -

1077 ACTIVO

If *1077# has not been typed correctly, the viewer will display -

ACTIVAR 1077

You can abandon the programming by pressing the key **Desactivar/Salir** (4), in which case the configuration will not have been changed.

Deactivating the 1077 code.

Press the **Marcar/Menú** key (21). If the Code 1077 is already activated, this message will be displayed in the viewer.

DESACTIVAR 1077

Type the sequence: #1077 #.

In the viewer, this message will be displayed for 2 seconds -

1077 INACTIVO

If #1077# has not been typed correctly, the message in the viewer will show -


DESACTIVAR 1077

4. DIALLING

Dialling Instructions


Dialling with the handset down or in hands free mode.

Pick up the hand piece or activate the hands free function. Wait for the dialling tone and then press the keys for the required telephone number. As you type, the numbers will be displayed in the viewer.




Dialling with the hands free function disabled.

Press the keys of required telephone number, which will be shown in the viewer as they are typed. To clear any number incorrectly typed, press the **Borrar** key (17).



To pick up the handset or activate the free hands function, and then listen for the dialling tone. Press the **Marcar/Menú** key (21).




With any dialling type, the viewer will display the length of time of the call after the last digit has been typed.

You can zero the chronometer in any time by pressing the key to **Borrar** key (17). This chronometer doesn't show the real time of the duration of the call.


To pause during dialling

To stop dialling momentarily, press the **Rellamada/Pausa** (13) key. There will be a pause of 2 seconds.



Transfer of calls to an extension (R/A-a key)

If the DOME Messages Hands Free apparatus is connected to a switchboard, press the key **R/A-a** key (8) followed by the extension number to which the call has to be transferred.



Automatic Dialling. This way of dialling is carried out without the necessity of using the numeric keyboard, so that with the handset not picked up, or with the activated or disabled hands free function, it provides three options.

Automatic Dialling from the Phonebook.



See information on storing names and numbers in the Phonebook in Chapter 5 of this manual.

Automatic Dialling from list of previous callers.

The DOMO Messages Hands Free phone stores a chronologically list of calls in its memory. To view the stored numbers, do the following –

With the Handset down or picked up, or with the disabled or activated hands free function:

Press the **Rellamada/Pausa** (13) key.


Use the cursors keys   (20) to find the number to be called.

Once selected (you can put down the handset or use the hands free function), press the **Marcar/Menú** (21) key.



Automatic Dialling from the List of Calls.

The DOMO Messages Hands Free has a list of the last 50 calls (incoming and outgoing) in chronological order. To initiate this list, make sure that you have ordered the caller Identification Service.

To automatically ring a number from the stored list, do the following -



- **With the handset down or picked up, or with the disabled or activated hands free function :**

Use the cursors   (20) to select the number to wish to call.

o8!  **MARINE ARAG**

Once the number is selected (put down the handset, or activate the hands free function if you wish), press the **Marcar/ Menú** key (21) to begin the call.

5. USE OF THE PHONEBOOK

The Phonebook has a maximum capacity of 50 entries into which you can type numbers of up to 24 digits plus an associated name of 15 characters. Once entered, a number and the associated name will be stored in alphabetical order in the Phonebook.

Dialling from the Phonebook

You can make a Phonebook entry during a conversation. This can be done with the handset down or picked up, or with the disabled or activated hands free function.

Press the **Grabar** key (10) and this message will be shown in the viewer.

GRABAR NOMBRE

A name is required for each entry as each number is stored alphabetically.

Type the name (up to 15 characters) using the letters on the numeric keys. These keys offer the following characters and numbers -

FERNANDO ARAG_

Key 1: 1. - > 1 i

Key 7: P Q R S 7

Key 2: A B C 2 " Ç

Key 8: T U V 8 ? ü

Key 3: D E F 3 \$

Key 9: W X Y Z 9 ÿ

Key 4: G H I 4 %

Key *: * + ;) (•

Key 5: J K L 5 &

Key 0: @ _ ' / o

Key 6: M N Ñ 0 6

Key #: (Space _ #) # : = <

For example, to enter the letter S, press the 7 key quickly four times.

Press the Grabar key (10) again to record the name in the phonebook. The viewer will display this message -

GRABAR NUMERO

Enter the telephone number associated with the name in up to 24 digits.

912397657

To conclude, press the **Grabar** key (10) to record the number. The viewer display will now request the next name.

GRABAR NOMBRE

If you need to, you can enter another name and number using the previous instructions. If you have no more to be entered, press the **Desactivar/Salir** key (4) to return to the normal display.

Recording of the rellamada in the calendar

With the handset down or picked up, press the **Rellamada/Pausa** key (13).

Press the keys cursor **▲ ▼** (20) to select the number that you want to record in the Phonebook.

Recording of the rellamada in the calendar

Press the **Grabar** key (10) and the viewer will display -

GRABAR NUMERO

Type the name and press the **Grabar** key (10). The telephone will store the name and number.

MIGUEL_

With the handset down or picked up, or the hands free function disabled or activated, press the cursor keys **▲ ▼** (20) until you can see the number you want to record in the Phonebook.

Press the **Grabar** key (10) and in the viewer this message will be displayed.

GRABAR NOMBRE

Type the name and press the **Grabar** key (10). The telephone will store the name and number.

If the stored number has a name associated with it, you can modify it by typing it again. To conclude it press **Grabar** key (10).

Using the Phonebook


Press the **Agenda** key (9).

Press the (7) key, which is the initial of the name you want to find, or several times, until in the viewer the first name is displayed. If there is more than one name starting with that letter, press the cursor keys ▲▼ (20) until it is found.

If the number shown has more than 15 digits, the symbols ◀▶ will be displayed to indicate that there is additional information, which will be shown after 4 seconds.



On the third line of the viewer, the number of the alphabetical position in the phonebook, will be displayed.




You can abandon the operation at any time by pressing the **Desactivar/Salir** key (4).

Automatic dialling from the phonebook

With the Handset up or down, or the hands free function disabled or activated:

Press the **Agenda** key (9).

Press the (7) key, which is the initial of the name you want to find, or several times, until in the viewer the first name is displayed. If there is more than one name starting with that letter, press the cursor keys ▲▼ (20) until it is found.



Once the number is selected, put down the handset, or activate the hands free function, and press the **Marcar/Menú** key (21) and the number will be dialled.

Deleting a Phonebook entry

While looking at a Phonebook entry, pressing the **Borrar** key deletes that entry. In the viewer a request for confirmation to delete will be displayed.

CONFIRMAR CON #

Press the **#** key to confirm, or press **Desactivar/Salir** (4) to cancel.

6. DIRECT SERVICES KEYS

Shortcut to the Telefónica personal attention line (1004)

With the handset up or down and with the hands free function activated, listen for the dialling tone.

Press the Blue key (16).

See the viewer display.



TELEFONICA

Access to the European emergency number

With the handset up or down and with the hands free function activated, listen for the dialling.

Press the Red key (19).

See the viewer display.



EMERGENCIA

Shortcut to the Telefónica operator selection

Dial the number of the Telefónica service required and with the handset up or down and the hands free function activated, press the Green key (18).

The number of the Telefónica service required will be prefixed to the number you dialled and the call will be started.



1077912397657


You can also press the Green key (18) with the handset down, to dial the number, to pick up the handset or to activate the hands free function and to press the **Marcar/Menú** key (21).

If it begins to dial after you put down the handset in active hands free function, press the Green key (18) followed by the number.

OPERADOR

7 FUNCTION MUTE

During a call it is possible to turn off the sound to the speaker so that the speaker cannot listen to you. To activate it:



Press the **Mute** key (14) during a conversation.

In the viewer this message will be displayed.

MUTE ACTIVO

The Red light will blink slowly.

To disable this function and recapture the conversation again, press the **Mute** key (14) again.

In the viewer this message will be displayed momentarily.

MUTE INACTIVO

During the period while the Mute is activated, you can use any of the functions that you would normally carry out with the taken handset down or the active hands free function.


8. LISTENING TO A CALL

When a call is received, the sound will be that of the pre-selected tone and volume. At the same time the Red light will be blinking.

To enter into conversation with the caller, pick up the handset or activate the hands free function.


If you have requested the Caller Identification Service, you will see the telephone number of the person calling displayed in the viewer. For more information on this service, see Chapter 10.

9. HANDS FREE FUNCTION

The DOMO Messages Hands Free phone incorporates a speaker (15) and a microphone (12) that allows you to speak and listen to the caller without having to pick up the handset. The  key (11) will toggle this option between active and disabled.

All the functions of the phone will remain active during the conversation in the hands free way.

Activation of hands free mode


You can activate the hands free option by pressing the  key (11) while the handset is operating in picked up mode.

The Red light shows the hands free mode is in operation, and you can communicate with the caller (to See remote 8) or begin a new call by means of the dialling procedures described previously (to See remote 4).

Changing hands free mode during conversation

If during hands free conversation it is necessary to pick up the handset, the viewer shows this message during the following seconds.

If while maintaining a conversation using the handset, you want to continue the same one in hands free mode,



MICROTELEFONO

press the (Mute) key (11). The handset is disabled and the conversation continues in the hands free mode. The viewer will display this message after a few seconds -

To return to using the handset, simply press the (Mute) key again (11).

Deactivating the hands free mode while in conversation

While in the hands free mode, you can end your conversation by pressings the (Mute) key (11). If however you are using the telephone with the handset picked up, you should press the (Mute) key (11). Either way, the indicator light will go out.

Adjusting the volume of the speaker

During a conversation in hands free mode, you can adjust the volume of the speaker by pressing one of the cursor (Up/Down) keys (20) until in the viewer the message is displayed (Corresponding to the last level of recorded volume).

Next you can increase the volume by pressing the cursor (Up) key (20) or diminish the volume by pressing the cursor (Down) key (20).



Adjusting the volume of the handset

During a conversation while using the handset, you can adjust the volume of the headphone. To do this press one of the cursor (Up/Down) keys (20) until this message is displayed in the viewer. (Corresponding to the last level of recorded volume),

Next you can increase the volume by pressing the cursor (Up) key (20) or diminish the volume by pressing the cursor (Down) key (20).

You will notice that the volume adjustments of the speaker and headphone are set independently.

MANOS LIBRES



◀ VOLUMEN: ↑ 8 ↓

{ VOLUMEN: ↑ 3 ↓

10. IDENTIFICATION OF CALL SERVICE

Requesting the Identification of Call service allows you to see in the viewer the caller's number (or name). This number remains displayed before you answer the call and during it. It is necessary to have the Messages of Text (SMT) service activated.

When receiving the call, the number of the caller is displayed.

912397657

If the caller's number coincides with one of those stored in the Phonebook, and there is an associate name with that number, the recorded name only will be displayed. When picking up the handset or using the hands free mode, the number associated with that name will be displayed. The hour and current date are also displayed, which can be viewed at a later time.

The number or name is displayed during the whole conversation, disappearing on hanging up the handset or disabling the hands free function, or if you carry out another operation on the phone during the conversation.

There may be a number of reasons for the information not to be displayed in the viewer. They could be -

- *The caller doesn't want to be identified.*
- *The identity of the caller cannot be ascertained (an example could be international calls).*
- *The call is made from a public telephone (from a different network).*

NUMERO PRIVADO

Nº NO DISPONIBLE

TELEF. PUBLICO

Information in the viewer (when the indicator light is not lit)


With the handset picked up and with the hands free function disabled, the viewer displays the hour and date, the total number of stored calls (received and outgoing), the number of new received calls from the last time it was inspected, and the number of received calls that have been repeated.

20:00 02 11 10 63

When new calls are received the Red indicator light will flash to indicate a call is waiting to be answered.

The indicator light will switch off automatically when the call is answered or the caller rings-off.

The phone can store up to 50 calls (received and outgoing) and it can update them with the handset picked up or with the hands free disabled or activated.



Viewing the incoming and outgoing calls.

Press the key \blacktriangle \blacktriangledown (20) to move through the list of calls from the most recent to the oldest or vice versa.

The viewer will display -

* On the first line is -

- the record number in the list.
- if the call was outgoing or incoming, and if it is an assisted incoming call.
- Telephone number.

02 \blacktriangleright 917404119

02! \blacktriangleright 917404119

02✓ \blacktriangleright 917404119

If the number coincides with one of those stored in the Phonebook and where there is an associate name, it will display the name first, and later the number after a few seconds.

If the number displayed is longer than that which will fit in the viewer, the symbols \blacktriangleleft or \blacktriangleright , will be shown indicating that you can assess the remainder by using those keys.

- On the second line of the viewer -
- Hours and dates (day and month) the time the call was received or a call was made.
 - Indication of a repeated call.

If you want to make a call to any of the stored numbers with the handset picked up or in activate hands free function mode, press the **Marcar/ Menú** key (21).

The numbers on those that you have dialled or assisted calls, are shown with a tick symbol ✓ to the right of the caller.

01 ✓ ↘ FRANCISCO

To return to the normal display, press the **Desactivar/Salir** key (4) followed by a ▲ or ▼ key (20) and allow time for it to happen.

Deleting Calls

Deleting Call records -

Whilst looking at the Call entries in the viewer, you can erase the current entry by pressing the Borrarr key (17). It will be necessary to confirm the deletion of the entry by pressing the # key.

BORRANDO...

Deleting all Call records -

With the handset picked up and hands free function disabled, press the Borrarr key (17)

If call entries are not currently being viewed, and are not displayed in the viewer, confirmation is requested with the # key.

CONFIRMAR CON #

If you have not viewed all the received calls, you won't be able to erase them.

LL. SIN REVISAR

If you want to cancel the operation, press the Desactivar/Salir key (4).

Make a Record in the Phonebook from the list of received calls

The procedure is described on page 12.

11. SUPPLEMENTARY SERVICES

The following Supplementary Services have to be requested before they can become available.

Diverting Calls

Activation

With the handset picked up or the hands free function activated, press the **Desvio** key (23).

PULSE No + DESVIO

Type the number that is to receive your diverted calls.

Press the **Desvio** key again (23).

PULSE No + DESVIO

While the diversion number is activated, an icon will be displayed in the viewer.

Desvio

When picking up the handset or in the hands free mode, the number displayed will be the one that the calls have been diverted.

While this service is activated, you cannot receive Text Messages (SMT).

Deactivation

With the handset lifted or the hands free function activated -

Press the **Desactivar/Salir** key (4).

DES. O CONTES?

Press the **Desvio** key (23).

DESVIO INACTIVO

The icon will cease to be displayed in the viewer.

IMPORTANT: The Redirect and Answering Machine can only be activated or deactivated from your own DOMO Hands Free telephone. If you attempt to activate and deactivate from different telephone or by means of the direct dialling codes of performance from a keyboard of the services, the telephone viewer will not indicate the correct situation of the service. Also if some failure of the telephone network takes place during the selection of these services, once again the viewer will not show the correct situation.

ANSWERING MACHINE SERVICE *To change the language of this service to English - see page 41.*
Activation

Pick up the handset or using the hands free function -

Press the **Contestador** key (2).

The Answering Machine icon will be displayed in the viewer.



CONTEST.ACTIVO

Desactivacion

Pick up the handset or using the hands free function -

Press the **Desactivar/Salir** key (4).

DES.V. O CONTES?

Press the **Contestador** key (2).

CONTES. INACTIVO

The Answer Machine icon will cease to be displayed.

ACCESSING the ANSWERING MACHINE

If you have received calls and messages that were stored in the Answering Machine, the indicator light will be lit in the viewer and a suitable message will be displayed (if the telephone network provides one).

MENSAJES VOZ

To listen to messages -

Pick up the handset or using the hands free function, press the **Mensajes/Aceptar** key (3).

In the viewer this message appears -

OIR MENSAJES

The Indicator Light will switch off after a certain time when a messages is received from another telephone.

CALL WAITING

During a conversation you can receive a second call. You will hear tones superimposed over your conversation and the viewer will display the callers number (if available from the telephone network and providing Call Identification has been requested).

To take the call –

Press the **LI Espera** key (22). Wait a moment.

In the viewer this message will be displayed,

LLAM. RETENIDA

These words will now be displayed -

Llamada Retenida

To get back to the first caller, press the **LI Espera** key (22). Wait a moment.

Pressing this key again will allow you to talk with alternate callers.

To end the active conversation -

Press the **Desactivar/Salir** key (4)

PULSE LL. ESPERA

Press the **LI Espera** key (22). Wait a moment.

MAKING A THREE-WAY CALL

You can have a conversation with two people on different lines.

To enter into a three-way conversation during a call -

Press the **LI. a Tres** key (5).

PULSE NUMERO

Type the second speaker's number.

Once in conversation with the second person, press LI. a Tres again (5).

In the viewer this message will be displayed -

LLAM. A TRES

together with these words -

Llamada a Tres

The telephone network will confirm that the function has been activated with a periodic tone.

To conclude the three-way call, hang up the handset or disable the hands free function.

At any time you can separate the two conversations -

Press the **LI Espera** key (22) and wait a moment.

LLAM. RETENIDA

Each press of the **LI Espera** key (22) will toggle between the other callers.

If during a communication you receive a second call, you can enter into a three-way conversation -

After pressing the **LI Espera** key (22), wait a moment.

LLAM. RETENIDA

Press the **LI a Tres** key (5).

LLAMADA A TRES

The process is the same as in the previous case.

Once separated, the two conversations can be completed with the one that is in course -

Press the **Desactivar/Salir** key (4).

PULSE LL. ESPERA

Press the **LI Espera** key (22) and wait a moment.

12. TEXT MESSAGING OF (SMT)

The DOMO Hands Free Messages telephone allows you to use the Text Messaging service provided by the telephone network. This allows for -

- Receiving text messages (SMT) coming from other fixed terminals or mobiles or from email addresses (*).
- Send text messages (SMT) to other fixed or mobile phones, and to email addresses and Fax telephones (*).

(*) the telephone network may not offer all these options.

If two or more telephones are connected to the same line, to text messages, each extension must be given **a different extension number** which must be between 1 and 9. As standard, the DOMO Hands Free Messages telephone is programmed at the factory with the extension as 1. If it is necessary to change this number, see the section on Change of Extension on page 27.

PLEASE NOTE: The relative information regarding the extension number for text messages purposes is displayed in the viewer in the following way -

- If the extension number appears in parenthesis, the phone cannot receive messages as another telephone exists with the same extension number. If it is the only extension with that number, the extension number will be displayed without parenthesis.
- If the extension number appears without parenthesis, the telephone you will receive messages on will be number 1

TELEFONICA (1)

TELEFONICA 1

TELEFONICA 1

Because each telephone can be used for more than an one user, the DOME Hands Free Messages telephone also offers the option to receive and to send private messages, to those 5 recipients that you will only have given high priority to. For more information, consult the section on remote Private Mail on page 29.

To activate and configure the Messaging Service, use the following instructions -

All the performances in the Service of Messages of Text (SMT) are carried out with the handset down and the hands free function disabled. The **Mensajes/Aceptar** key (3) allows you to see the menu of Text Messages (SMT) and also confirms any action needed. The cursor keys **▲** and **▼** (20) allow you to navigate through the different menu options. To return to the previous screen, press the **Desactivar/Salir** key (4).

To
**ACTIVATE /
DISABLE**
the Text
Messaging
Service
(SMT)

To Activate the Text Messaging Service (SMT)

With the handset down and the hands free function disabled, press the **Mensajes/Aceptar** key (3) to view the text messaging menu. Next press the cursor keys **▲** and **▼** (20) until in the viewer the following message is displayed -

◀ ▶
ACTIVAR SMT

Only on the first occasion that you press the **Mensajes/Aceptar** key (3) will you be offered this option.

EXTENSION: ¿1?

To activate the Service, press the **Mensajes/Aceptar** key (3) and you will be requested to type the extension number of the terminal.

ACTIVAR EXT (1)

During this request, the last stored extension number will be displayed. If a terminal with that number already exists the terminal will suggest another number. Press the **Mensajes/Aceptar** key (3) and a message will be displayed showing the proposed extension number.

ESPERE

To confirm this extension number, press the **Mensajes/Aceptar** key (3) again to continue.

Wait until the viewer displays this message –

ACTIVADO

This message will remain displayed for several seconds.

TELEFONICA (1)

In the case of a problem that doesn't allow to activation of the service, an error message (see page 37) will be displayed for several seconds. You will then be able to retry the operation by pressing the **Mensajes/Aceptar** key (3).

ACTIVAR (1)

If at any time before confirming the activation (detailed below), you want to stop the process, press the **Desactivar/Salir** key (4).

If you want to connect your DOMO Free Hands Messages telephone to the Text Messaging Service (SMT) to a different telephone extension number, it must first be disconnected from the previous extension number.

Deactivation of Service of Messages of Text (SMT)

With the handset down and the hands free function disabled, press the **Mensajes/Aceptar** key (3). Next press the cursor keys \blacktriangle and \blacktriangledown (20) until the viewer displays this message -

DESACTIVAR SMT

If you want to disable the Service, press the **Mensajes/Aceptar** key (3)

ESPERE...

Wait until the viewer displays this message -

DESACTIVADO

This message will remain for several seconds.

In the case of a problem that doesn't allow you to activate the service, the viewer will show an error message (page 37) for several seconds, followed by this message -

DESACTIVAR SMT

You will be able to retry the operation by pressing the **Mensajes/Aceptar** key (3).

CHANGING THE EXTENSION NUMBER

If you use more than one extension on the same telephone line for Text Messaging, each extension must have a different extension number, between 1 and 9.

If you have already activated the Text Messaging Service (SMT) and you need to change the extension number, first you must first disable the service from the current number before proceeding with the change.

To change the extension number follow these instructions -

With the handset down and the hands free function disabled, press the **Mensajes/Aceptar** key (3). Press the cursor keys **▲** and **▼** (20) until this option is displayed in the viewer -

◀ **CAMBIAR EXTENS.** ▶

Press the **Mensajes/Aceptar** key (3) and you will be requested to assign a new number.

EXTENSION: ¿1?

The last stored extension number will be displayed in the viewer. If an extension already exists with the number requested, the telephone will offer an alternative number. Press the **Mensajes/Aceptar** key (3) and a message will appear showing the proposed extension number.

ACTIVAR EXT (2)

To confirm the new number, press the **Mensajes/Aceptar** key (3).

ESPERE...

Wait until this message is displayed in the viewer -

ACTIVADO

The message will remain displayed for several seconds.

TELEFONICA (2)

If there is a problem that doesn't allow activation of the service, an error message (page 37) will be displayed for several seconds. You will be able to retry the operation by pressing the **Mensajes/Aceptar** key (3).

ACTIVAR (2)

PRIVATE MAIL

The DOMO Hands Free Messages telephone offers the option to receive and send up to 5 'private mail' messages, to those who have access to such mail, and who have been defined using the following parameters -

Name: Identification of a user with private mail. This parameter can consist of 1, 2, 3 or 4 characters.

Pin Number: This allows a user of private mail to read messages having first keyed in an easy to remember security number. This parameter is numeric and consists of 4 digits.

Next, you can see how to create, edit and erase Private Mail.

With the handset down and the hands free function disabled, press the **Mensajes/Aceptar** key (3) to view the menu of text messages (SMT). Next press the cursor keys \blacktriangle and \blacktriangledown (20) until the viewer displays this message -

< >
CORREO PRIVADO

To create user

To continue, press the **Mensajes/Aceptar** key (3) and this message will be displayed -

< >
CREAR USUARIO

Again press the **Mensajes/Aceptar** key (3) and you will be requested to type the user's name. This is done using the characters on the numeric keyboard (7). This can consist of 1, 2,3 or 4 characters. When complete, press the **Mensajes/Aceptar** key (3). If the name already exists, the viewer will display -

¿NOMBRE?

JOSE

ERROR: YA EXISTE

You will then be requested to enter the user's name again.

¿CLAVE?

1234

Next enter the security number consisting of 4 digits. Press the **Mensajes/Aceptar** key (3). Once created, it will be displayed again.

< >
CORREO PRIVADO

To modify a user name

To modify the name and/or the key associated to a recipient of private mail, access the submenu 'Correo Privado' using the cursor keys **▲** and **▼** (20) and press the **Mensaje/Aceptar** key (3) and follow the instructions for remote 'Correo Privado' on page 28.

When displayed in the viewer, press the **Mensajes/Aceptar** key (3).

Next the viewer will display a list of names that they have already been created and stored. Using the cursor keys **▲** and **▼** (20), select the name to be modified, and when found, press the **Mensajes/Aceptar** key (3).

Change the name as required using the characters on the numeric keyboard (7), and press the **Mensaje/Aceptar** key (3) when complete.

If you need to erase all the characters of the name, use the **Borrar** key (17). Type the new name using the characters on the numeric keyboard (7) and press the **Mensajes/Aceptar** key (3).

The modified name will now be displayed in the viewer.

The modified name will be displayed in the viewer under the associated key. You can modify it, erase the currently displayed name and add a new name, following the same procedure.

To confirm the modification, press the **Mensaje/Aceptar** key (3).

To delete a user name

To erase a user name, from the 'Correo Privado' menu (see page 29), press the **Mensajes/Aceptar** key (3). Using the cursor keys **▲** and **▼** (20) access the 'Borrar Usuario' option and press the **Mensajes/Aceptar** key (3).



Access the list of names that they have already been created and stored. Move through the list using the cursor keys \blacktriangle and \blacktriangledown (20) and select the user name to be deleted.

Press the **Mensajes/Aceptar** key (3). A confirmation key will be requested. Type this key and press the **Mensajes/Aceptar** key (3) again.

¿CLAVE?

1234

The actions you take will be displayed in the viewer.

If you type an incorrect confirmation key, this message will be displayed in the viewer -

BARRANDO

If you make a second mistake, the operation will fail and this message will be displayed -

CLAVE ERRONEA

Attempting a third try will erase all the messages associated with the name..

OTRO FALLO



If you have forgotten the key associated with the name, an emergency option is offered. Note - all messages associated with that name will also be erased. When you are requested to enter the key, type it 3 times.

SENDING A MESSAGE

With the handset down and the hands free function disabled, press the **Mensajes/Aceptar** key (3) to access the menu of text messages (SMT). Next press the cursor keys \blacktriangle and \blacktriangledown (20) until the name required is displayed in the viewer.

◀ ▶
ENVIAR / EDITAR

Press the **Mensajes/Aceptar** key (3) and next type the message text using the characters on the numeric keyboard (7). A messages can be up to 640 characters in total, in blocks of 160 characters as indicated in the corner


HOLA_

of the viewer (e.g. 1 of 4). Once you have typed over 160 characters, a double envelope will also be displayed in the main part of viewer. The assignment of characters and symbols on the keyboard are as follows -

Key 1: 1 . - > 1 i	Key 7: P Q R S 7
Key 2: A B C 2 " Ç	Key 8: T U V 8 ? ü
Key 3: D E F 3 \$	Key 9: W X Y Z 9 ÷
Key 4: G H I 4 %	Key *: * + ;) (•
Key 5: J K L 5 &	Key 0: @ _ , ' / o
Key 6: M N Ñ 0 6	Key #: (Space) #: = <

You can change between uppercase and lowercase (and vice versa) by pressing the **R/A-a** key (8).

If correct a mistake, press the **Borrar** key (17), which will delete the last entered character.

If a message cannot be sent immediately, it will be stored as indicated in the viewer by a flashing envelope .

Choosing the despatch format (Message, E-Mail or Fax)

The DOMO Hands Free Messages telephone allows you to send text messages (SMT), e-mail and faxes. Once you have typed a message, or modified an existing one, pressing **Mensajes/Aceptar** key (3) will allow you to select the despatch format for the message.

◀ ▶
ENVIAR MENSAJE

Text Messaging (SMT) is the default option with E-MAIL and FAX being accessed by using the **^** and **v** keys (20). The following instructions details how to proceed for each of these options.

1. - To send a Text Message (SMT)

When this message is displayed in the viewer -

◀ ▶
ENVIAR MENSAJE

Press the **Mensajes/Aceptar** key (3). The user's telephone number will be requested. Type the number using the numeric keyboard (7) or select it from the Phone Book by pressing the **Agenda** key (9). Press the **Mensajes/Aceptar** key (3) again.

DESTINATARIO

Next you will be asked (optionally) to type the user's name (for purposes of creating a Private Message). Press the **Mensajes/Aceptar** key (3) anyway. Next the destination extension will be requested (optional - if there is more than one extension on the telephone number). Press the **Mensajes/Aceptar** key (3) anyway. The message will be displayed in the viewer.

¿**NOMBRE?**

¿**EXTENSION?**

◀ ▶
ENVIAR: SI

To complete despatch of the message, press the **Mensajes/Aceptar** key (3). Otherwise, press the cursor keys ▲ and ▼ (20) until an M is displayed.

ENVIANDO

ENVIAR: NO

Press the **Mensajes/Aceptar** key (3) and use the cursor keys ▲ and ▼ (20) to choose between the options to keep or erase. Press the **Mensajes/Aceptar** key (3) to confirm the selected option.

2. - To send an E-mail

When the E-mail option is displayed in the viewer, press the **Mensajes/Aceptar** key (3). Type the email address and press the **Mensajes/Aceptar** key (3) again.

◀ ▶
ENVIAR E-MAIL

DESTINATARIO

This message will be displayed -

◀ ▶
ENVIAR: SI

To send the E-mail, press the **Mensajes/Aceptar** key (3) and this message will be displayed -

ENVIANDO

If you decide not to send the e-mail, press the cursor keys ▲ and ▼ (20) until this message is displayed -

◀ ▶
ENVIAR: NO

Press the **Mensajes/Aceptar** key (3) and choose between the options to keep or erase. Press the **Mensajes/Aceptar** key (3) again to confirm.

3. - To send a Fax

When this message is displayed -

◀ **ENVIAR FAX** ▶

Press the **Mensajes/Aceptar** key (3). First the subject title will be requested (optional). Type this, if required, in up to 255 characters and press the **Mensajes/Aceptar** key (3) anyway.

◀ **¿ASUNTO?** ▶

Next, the addressee's number will be requested. Type it using the characters on the numeric keyboard (7) or select it from the Phone Book by pressing the **Agenda** key (9) and pressing the **Mensajes/Aceptar** key again (3).

◀ **DESTINATARIO** ▶

When this message is displayed -

◀ **ENVIAR: SI** ▶

To send the Fax, press the **Mensajes/Aceptar** key (3). See this message -

◀ **ENVIANDO...** ▶

If you decide not to send the Fax, use the cursor keys ▲ and ▼ until this message is displayed -

◀ **ENVIAR: NO** ▶

Press the **Mensajes/Aceptar** key (3), and select the option to keep or to erase the message by using cursor ▲ and ▼ keys (20) and pressing the **Mensajes/Aceptar** key (3) to confirm the selected option.

If a message cannot be delivered, you will receive a message indicating the reason (disabled service, agreement doesn't exist with the operator, the extension doesn't exist, etc.).

At any time during the above process, you can cancel the operation by pressing the Desactivar/Salir key (4).

RECEIVING MESSAGES

When a text message is about to be received, the telephone will produce a tone and display this message -

ESPERE...


When the message has been received the telephone gives a second tone, indicating that the message has been received correctly, and this message will be displayed -

RECIBIDO

When a communication error happens, the message will be -

ERROR RECEPCION

TO READ MESSAGES

The existence of new messages is indicated in the viewer with flashing envelope .

MENSAJES TEXTO

To read messages, press the **Mensajes/Aceptar** key (3) with the handset down and the hands free function disabled. The display will be -

< LEER >

Information about the message will be listed -

1. The position of the message in the list.
2. Symbols ! or ✓ indicate if it is a new or saved message, respectively.
3. The characters ↘ or ↗ shows if it is an incoming or outgoing message.
4. Next,
 - if the message is incoming, and not private, the sender's number or the name if it is in the Phone Book.
 - if it is a private incoming message, private user's name will appear in parenthesis.
 - if the message is outgoing, the destination will appear which that can be, a telephone number or user's name if it is in the Phone Book, a fax number or an Internet address.

01! ↘ ALMUDENA

01! ↘ 91445566

01! ↘ ALMUDENA

01! ↘ (ALMU)

02! ✓ ↘ 91445566

02! ✓ ↘ ROSA ROMERO

Pressing the cursor keys **▲** and **▼** (20) you can move through the list of messages from the most recent to the oldest or vice versa.

Having selected a message, press the **Mensajes/Aceptar** key (3) to view the text and with the cursor keys **▲** and **▼** (20) to access it.

If it is a private message, in the finder this message will be displayed -

01! ✓ ▾ (PEPE)

Type the security key (of 4 digits) and press the **Mensajes/Aceptar** key (3). If the key is correct, the number (or name) will be displayed, followed by the text. Move through the text using the cursor keys **▲** and **▼** (20).

¿CLAVE?

1234

To leave the message, press the **Desactivar/Salir** key (4).

If the message is incoming (received), press the **Mensajes/Aceptar** key (3) to displayed in the viewer, these options - to Respond, to Forward, to Erase and to Keep.

◀ RESPONDER ▶

◀ REENVIAR ▶

For outgoing messages, the options are - to Forward, to Erase and to Keep.

◀ BORRAR ▶

Using the cursor keys **▲** and **▼** (20), you can access any of them.

◀ GUARDAR ▶

To respond to received messages

When this message is displayed – (as indicated in the section on reading Messages on page 35), press the **Mensajes/Aceptar** key (3). To respond to the message, proceed as detailed on page 32.

◀ RESPONDER ▶

To forward messages

When this message is displayed – (as indicated in the section on reading Messages page 35), press the **Mensajes/Aceptar** key (3), and you can modify the message content.

◀ REENVIAR ▶

Press the **Mensajes/Aceptar** key (3) and proceed as indicated in the 'Despatch of Messages' on page 32.

To erase messages

On seeing this message - (as indicated in the section on Reading Messages on page 35), press the **Mensajes/Aceptar** key (3) and the message will be deleted.

◀ **BORRAR** ▶

BORRANDO

From the list of messages that have been 'Read', access the message required and press the **Borrar** key (17) to Erase it. Confirm by pressing the # key. You cannot erase messages that have not been read.

CONFIRME CON #

BORRANDO

To keep messages

On seeing this message - (as is indicated in the section on Reading Messages on page 35), press the **Mensajes/Aceptar** key (3), and it will store the message.

◀ **GUARDAR** ▶

GUARANDO

Error types

During the activation or deactivation of the text messaging service (SMT), as well as during the despatch or reception of a text message, the following errors may occur -

1. – Despatch Error

This error appears if the message has not been possible to despatch because of communication failure.

In the viewer this message will be displayed for a few seconds.

ERROR ENVIO

2. Error. Service not activated

This error happens when you try to send a text message without first activating the service. Displayed in the viewer will be -

ERROR, ACTIVESE

3. - Destination Error

When the addressee doesn't have the text messaging service activated. The message in the viewer will be -

ERROR DESTINO

4.- Error reception

If during the reception of the message an communication error happens, the telephone will display this message -

ERROR RECEPCION

13. DISTRIBUTION LISTS

IMPORTANT: This option is only available if supplied by the telephone network.

The distribution list allows sending a message to several different destinations.

The necessary parameters in a 'distribution group' are -

- Name of the distribution group.

- Destinations list - these are the destinations to which the message will be sent.

The DOMO Hands Free Messages telephone will let you configure the group names and the destinations.

Once defined, the process is automatic, and will send the message to all the recipients in the distribution group.

As explained below, there can be many groups and each allow for the operator to create, to erase, to include, to remove, to view and to send entries. They are carried out by means of despatch of specific messages or commands to the telephone number 4545 that will not be charged for. The editing of these messages could be carried out in UPPERCASE characters.

Creating a group

To create a group, type the following message using the dialling keys (7) -

##CRG#TRABAJO##

##CRG#<Group Name> ##

After creating the group, you will be sent a text message stating that the request has been accepted -

**SE HA CREADO
TRABAJO**

It has been created < Group Name >.

Adding a Destination to a group

Depending on the destination, the message format should be -

**##A1#TRABAJO*91396
751*1*INMA##**

***A#<Group_Name>*<Telephone_No>
* <No_of_terminal>*<Security_Code> ##

***AEI#<Group_Name>*<direction_E-
mail>##

**##AE1TRABAJO*INMA
@HOTMAIL.COM##**

After including the new member in the group, you will receive a text message informing you that the request has been accepted - *"The member <Datos_del_integrante> has been included in <Group_Name>."*

**EL INTEGRANTE INMA SE
HA INCLUIDO EN
TRABAJO**

To erase member of a group

The format message will vary, according to the type of destination -

***B1#<Group_Name>*<Telephone_No>
* <No_of_terminal>*<Security_Code>##

**##B1#TRABAJO*91396
751*1*INMA##**

* **BEI#<Group_Name>*<direction_E-
mail>##

**EL INTEGRANTE INMA SE
HA BORRADO DE TRABAJO**

After erasing the member of the group, you will be sent a text message confirming the request has been accepted - *"The member <Group_Data> has been removed <Group_Name>."*

**##AE1TRABAJO*INMA
@HOTMAIL.COM##**

To change a member of a group

If you want to change the data of a member of a group, and so as not to complicate matters with unnecessary commands, you should -

1. Remove the group to which the member belongs.
2. Add to the group the member with the changed data.

To erase a group

Introduce the following message -

##BG#<Group_Name>##

##BG#TRABAJO##

This action will erase all the members of the group and the group name. Next, you will be sent a text message informing you that the request has been accepted - *"This has been erased <Group_Name>."*

**SE HA BORRADO
TRABAJO**

To view the defined groups

The message format should be -

##CG##

##CG##

The confirmation of the requested action will consist of a text message with the names of the groups –
“The groups are: <Group_Name> * <Group_Name_2> * ... * <Group_Name_N>.”

**SUS GRUPOS SON:
TRABAJO*AMIGOS*
FUTBOL**

To view members of a group

Type the following message -

##CI#<Group_Name>##

¿NOMBRE?

You will receive a message in which will include the members of group -
“The members of <Group_Name> are:
<data-of-member_1> *
<data_of_member_2> *... *
<data_of_member_N>.”

**LOS INTEGRANTES DE
TRABAJO SON:
91396751;INMA*91255180;
FRANCIS*91397657;ROSA.**

The fields that make up the data of the members, are separated with the symbols “;”.

To send a message to a group

To send a message, type the following format -

##E#<Group_Name>##<Message_Text>

**##E#TRABAJO##
MANANA REUNION A
LAS 11H**

By following these actions you will be sending the message included in the command <Message_Text> to all the members in the group.

If when sending a message, ERROR ENVIO is displayed in the viewer, consult the Troubleshooting section of this manual. If there is another reason for the error, a different message will be displayed, allowing you another attempt to send the message.

14. CHANGE ANSWERING SERVICE LANGUAGE TO ENGLISH

Pick up the DOMO handset and press the key **Contestador** .

When this message will be displayed in the viewer, replace the handset.

Activo

Now complete the following steps -

1. Lift DOMO handset and press the **Mensajes** key.
2. When the message you hear ends, press No.1 on the keypad.
3. When the next message you hear ends, press No.4 on the keypad.
4. Enter a four digit code e.g. 0000 (You must remember this code).
5. When the next message you hear ends, press No.3 on the keypad.
6. When the next message you hear ends, press No.1 on the keypad.
7. Finally, when the next message ends, press No.1 again.
8. Replace the handset.

When the phone rings and you are unable to answer, the answer machine message will cut in after 5 rings.

To retrieve messages, pick up the handset and press the **Mensajes** key. Follow the instructions which will now be in English.

15. TROUBLESHOOTING

PROBLEM

SOLUTION

If when sending a message, E-mail or fax, the message ERROR ENVIO is displayed.

Try pressing the Mensaje/Aceptar key (3) or to Cancel, press the cursor keys. You will be able to erase or to keep the message, E-mail or fax.

If, when sending a message, E-mail or fax, one of these messages is displayed – ERROR, ACTIVESE or ERROR DESTINO

In the first case you have not activated the Text Messaging service. ERROR DESTINO appears if the addressee has not activated the service. In either case, use the options to Keep the message and send it when the errors have been rectified.

When pressing the Messages key the message POCA MEMORIA BORRE MENSAJES is displayed.

The telephone has used up all available memory. Erase messages no longer necessary. Until this is done new messages cannot be sent or received.

If when trying to create a private list, the message MEMORIA LLENA is displayed.

This message indicates that you already have the maximum number of 5 groups (lists). To create a new one you must first delete one or more of those already created.

The Viewer remains blank.

Reinstall and connect the phone directly in the PTR. If the problem persists, contact Telefónica.

The redirection symbol is not displayed.

The redirection was not really activated and a call was received. Activate the deviation again.

Nothing is displayed in the viewer when I pick up the handset.

Make sure the cord to handset is correctly connected.

The telephone works perfectly but the viewer shows nothing.

Modify the contrast.

The ring (tone) is too quiet.

Change the volume.

The viewer doesn't show the callers identification.

Check that you have activated the Identification of Calls service.

The telephone doesn't respond to the actions made by the user, as requested. Example: pressing keys, etc.

Where it accepts actions, but the data, Phone Book, and other data stored in the telephone at factory configuration, do not respond.



Hold down the 1 key followed by the 3 key, pick up the handset, stop to pressing the keys and then put the handset down.

16. MAINTENANCE

The DOMO Hands Free Message telephone doesn't require any special maintenance. To clean use a damp cloth. Do not use abrasives or solvents for cleaning as these could damage the equipment. Avoid blows and/or possible falls to the floor, and do not locate near sources of heat or exposed directly to the sun.

17. TECHNICAL SPECIFICATIONS

Minimum isolation resistance between earth and accessible parts	100 M
Minimum dielectric strength	500V
Return losses	> 14 dB
Codes of dialling frequency	CCITT Q.23
Time Emission	70ms ± 5%
Time Pauses	140ms ± 5%
Duration of the temporised opening	100ms ± 5%
Time of pause between dialling	25± 5%
Time of maintenance of the Phone Book, lists of incoming calls, lists of outgoing calls with the disconnected telephone	limited
Code call-up identification	FSK ETSI 300 778-1 and 2
Size available to list of callers: memory/characters/digits	50/15/24
Size available to the Phone Book: memory/characters/digits	50/15/24
Size available to list of messages: No. of Messages/Characters	50/80 or 25/160
Acoustic level of the call signal (high level)	81 dBPWL
Total weight	600 gr
External size	W x H x D: 226 x 63 x 149 mm
Operating temperature	0° and 55°C
Storage temperature	-20° and 70°C
Maximum humidity	90%

18. GUARANTEE CERTIFICATE

Telefonica

CERTIFICATE OF GUARANTEE

Telefónica de España S.A.U.
Gran Via, 28 Madrid

Details of Customer

Acquired from _____
Customers Name _____
Address _____ _____
Town _____
Province _____
Post Code _____
Telephone Number _____

IDENTIFICATION DETAILS

Type - Serial No.
DOMO Mensajes
Manos Libres

TYPE OF GUARANTEE

See conditions of
guarantee overleaf

18. CONDITIONS OF GUARANTEE

Telefonica

CONDITIONS OF GUARANTEE

The DOMO covered by this guarantee has been manufactured to normal standard of quality, and has been subject to approval tests.

In the event of non-conformity to the contract, the user will be able to exercise his rights under the conditions and fixed terms detailed under Law 2312003 of Covenants of ownership for the Sale of Goods of use, the right to a repair, substitution, reduction of the price or change of contract. It will be necessary for the user to provide an invoice or delivery note.

The user will be informed how the substitution of the Domo will take place to conform to legal requirements.

Telephone 1002 and 1004

The substitution for a Domo, which has been subject to a mishap, is not included in the guarantee.

A mishap includes the incorrect use or treatment, or incorrect manipulations and installations after the sale from TELEFÓNICA OF SPAIN.

Also not included are mishaps caused by catastrophic causes (fire, floods...), atmospheric problems (lightning, etc.), blows and drops.

In the case of having a maintenance contract with Telefónica of Spain, you will get on-site attention from engineers.

Telefónica

